

softech

fabric Collection
the most comfortable
seat and back to be





CHAIR



SOFA




STF 4131-81S

DARK RED




STN 4131-81B

DARK RED

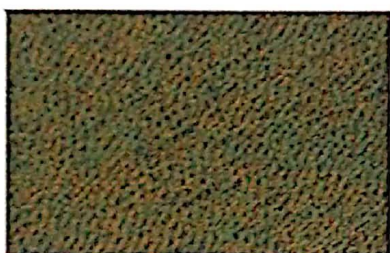

STF 4131-83S

LINE GREEN

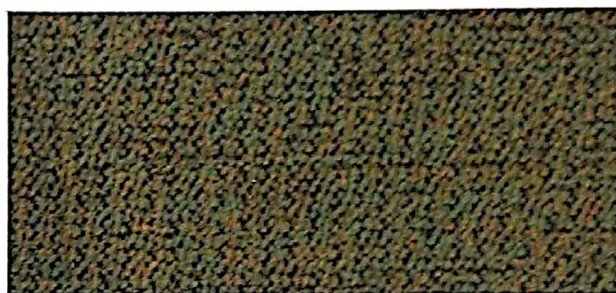

STN 4131-83B

LINE GREEN




STF 4131-85S

MID GREY




STN 4131-85B

MID GREY

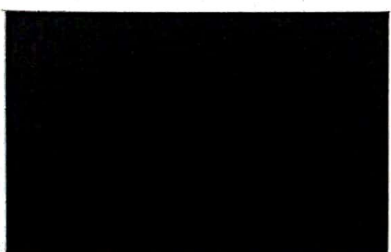

STF 4131-87S


BLACK

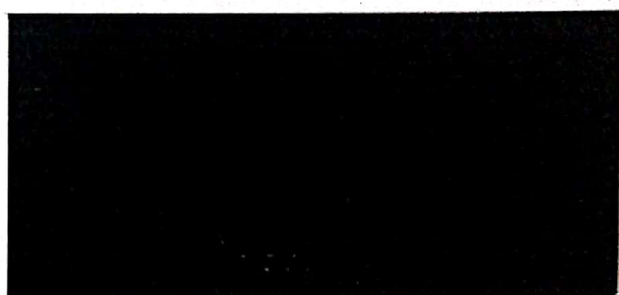

STN 4131-87B


BLACK

softech

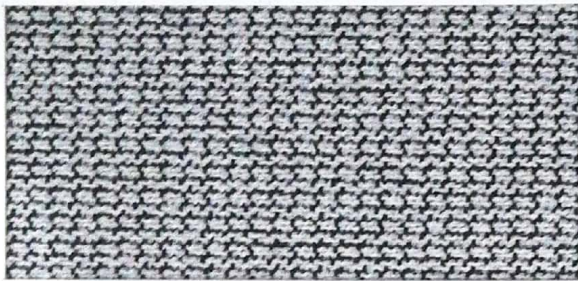


STN 4131-80B

LIGHT GREY

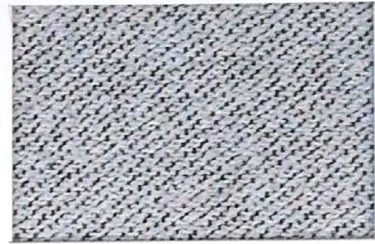


STF 4131-80S

LIGHT GREY

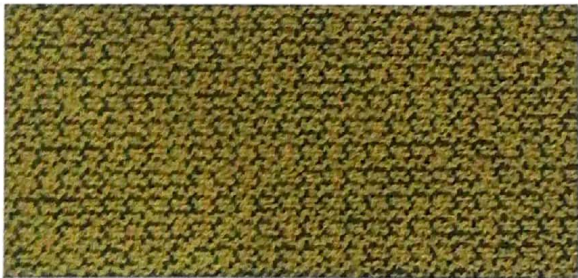

STN 4131-82B

LEAFY GREEN

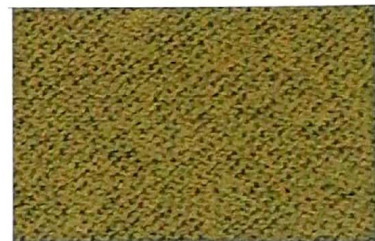

STF 4131-82S

LEAFY GREEN



STN 4131-84B

TURQUOISE BLUE



STF 4131-84S

TURQUOISE BLUE



STN 4131-86B

DARK BLUE



STF 4131-86S

DARK BLUE

SPECIFICATION

DESIGN	SOFTEC	
MATERIAL	POLYESTER /POLY ELASTOMERIC	
WIDTH	CM	165
FIBER COMPOSITION	ASTM D 629 : 2015	POLYESTER : 100%
WEAVE	VISUAL METHOD	DERIVATIVE WEAVE
MASS	ASTM D 3776 : 2009 (G/M ²)	422.8
PILLING	ASTM D 3512 : 2014, RANDOM TUMBLE METHOD (GRADE)	30 MIN : 4.5
TENSILE STRENGTH	ASTM D5034 : 2009,C.R.E, GRAB METOD	WARP : 278.7 (287.5) WEFT : 999.1 (449.4)
COLOR FASTNESS TO CROCKING	AATCC 8 : 2013 (GARDE)	DRY : 4 WET : 4.5
COLOR FASTNESS TO LIGHT	AATCC 16.3 : 2014, XENON-ARC-LAMP, GRAY SCALE (GRADE)	20 AFU : 4.5
FLAMMABILITY	CALIFORNIA TECHNICAL BULLETIN 117, SECTION E (2000) - [BURNING RATE(S)]	CONCLUSION : PASS
ABRASION RESISTANCE	ASTM D 4966 : 2012, MARTINDALE METHOD, OPTION 1 (RUBS)	90,000

scan me



www.nexuscollection.com

nexusTM
COLLECTION



Whilst every effort shall be made to achieve colour matching, shades may vary between dye lots.